

PLASTABRICK SLAB

TILT SLAB SYSTEM

DESCRIPTION

Tilt Slab Texturing System


SYSTEM GUARANTEE PERIOD

15 years

WORKMANSHIP GUARANTEE

5 years

SYSTEM CONSTRUCTION:

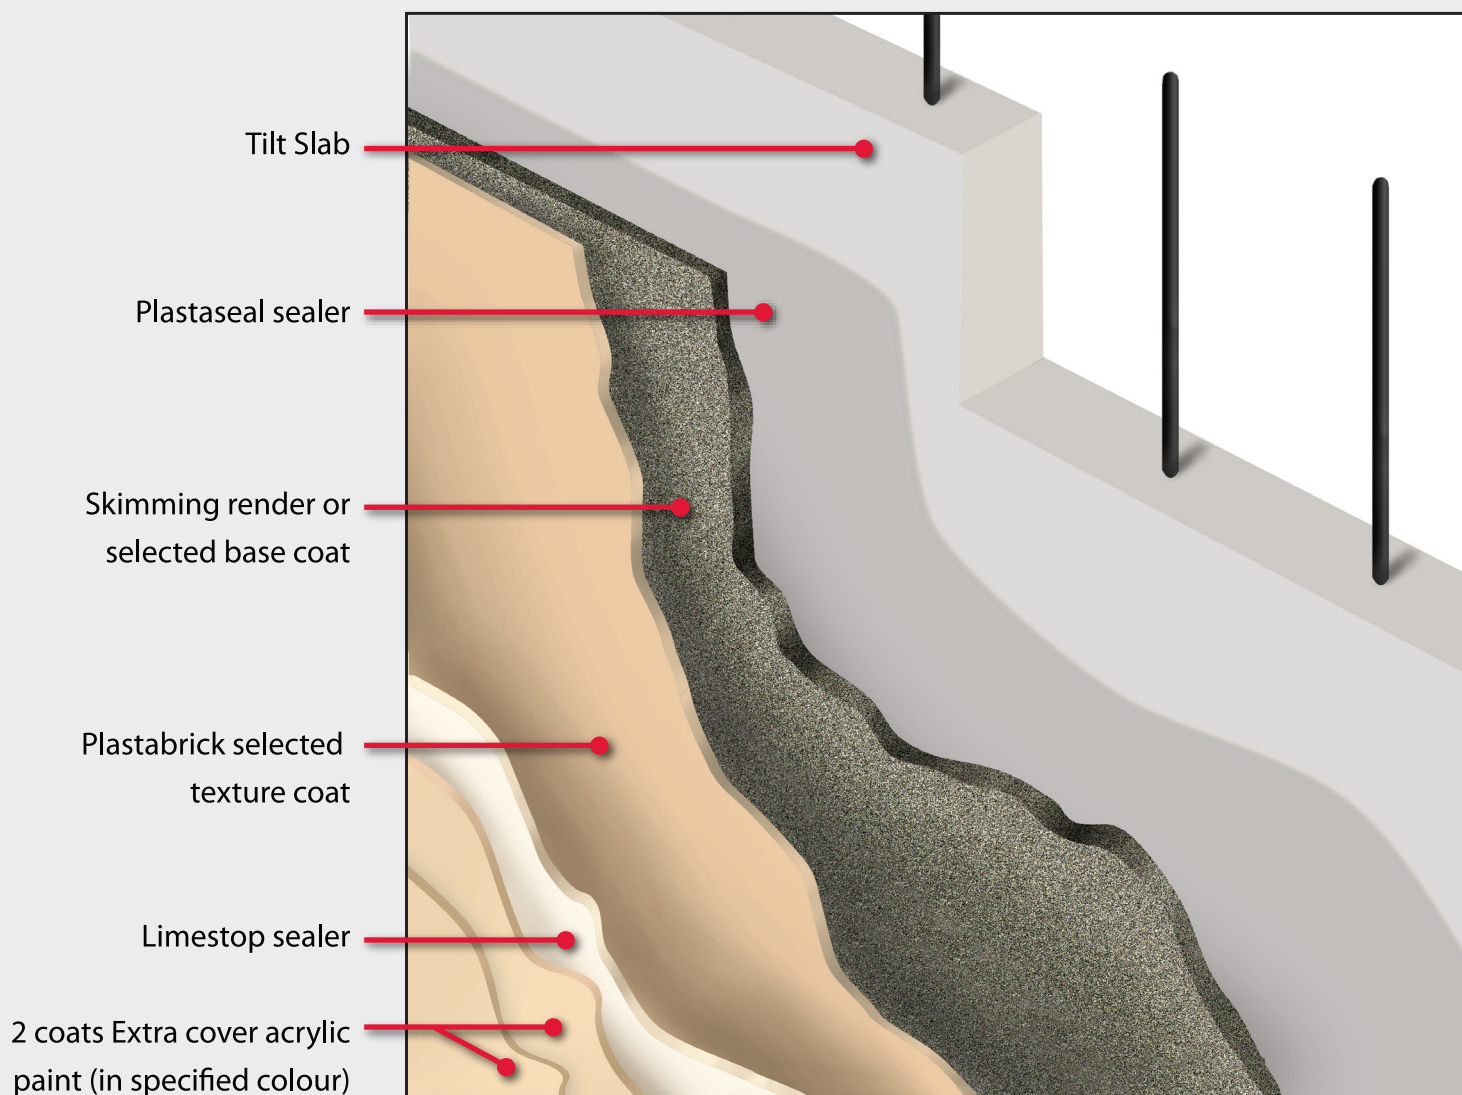

PLASTASLAB

TILT SLAB SYSTEM

WHAT IS PLASTASLAB?

A masonry render system for smoothing and texturing off form concrete. The system provides a hard durable surface which when painted is waterproof and easier to maintain than a standard painted wall.

ADVANTAGES

- Easy to keep clean and weatherproof when painted
- A wide range of finishes can be achieved

APPLICATION

Substrate

Concrete should be fully cured and dry.

Preparation

Surface should be clean and dry. Dags and proud areas should be ground down.

A single coat of Plastaseal should then be applied to the whole wall to assist with controlling suction during plaster application.

Filling

Hollow and voids must be filled with PlastaTek Meshing Plaster. These filled areas can be sanded the next day but it is preferable to fill level as the plaster will be hard and difficult to sand.

Flushing

Basecoat, lightweight basecoat or skimming render can be applied tightly in a thin application to ensure plaster is forced into the surface and then brought out to a flat finish with extra product.

Texturing

The desired texture from the Plastabrick range can now be applied. Options are 1mm, and Adobe which are painted over with a coat of Limestop and two coats of Extra Cover.

Painting

Paint in accordance with the chosen texture specification. Extra Cover paint is recommended. Walls should be dry when painted and the plaster requires 2-3 days curing before application of the paint.

Accessories

PVC corner beads can be used to form straight corners.

Special Notes

This system will provide weatherproofing to the wall when properly painted however it is the designers responsibility to provide adequate detailing for penetrations, tops and sealant details.